


CHAIN

Pewag Chain Sling, Winner 200
(Chain is based on ASTM A973M-01.)

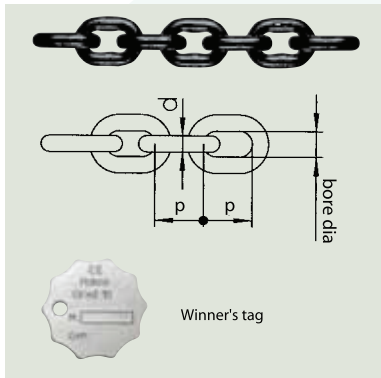

โซ่ PEWAG มาตรฐานยุโรป จากออสเตรีย
น้ำหนักเบา ทนทานกว่า สิ้นค้าพรีเมียม!!


Pewag company is the first company to provide sling chain, Grade 10 to the market.

Chain diameter d	Pitch P (A)	Bore dia (A)	Safe Working Load (t)	Breaking Load (kN)	Weight (O/m)
5	16	7.5	0.8	39.3	0.61
6	18	8.7	1.12	56.5	0.89
8	24	10.9	2.0	100	1.57
10	30	13.5	3.2	157	2.46
13	39	17.5	5.3	266	4.18
16	48	21.5	8.0	402	6.28
19	57	25.6	11.2	567	8.90
22	66	29.5	15.0	760	11.88

* bore diameter is minimum *Please inquire because of non-stocked item.

ตารางเมื่อเปรียบเทียบกับโซ่ G80


Comparing strength with grade8 (about 25% up)

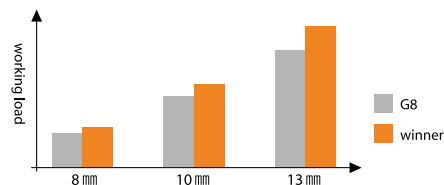

In case of 2 point hanging and within 90°(a angle)

Safe Working Load (t)	G8 Chain (A)	Winner Chain (A)
2.8	10	8
4.4	13	10
7.4	16	13

Easy handling with weight saving of 30%

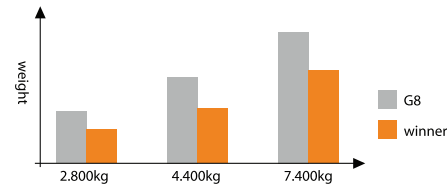

Weight comparative chart

Safe Working Load (t)	G8 Chain (A)	Winner Chain (A)	Less Rate (%)
2.8	16.2	11.0	32
4.4	27.6	17.6	36
7.4	42.2	29.6	30

Link Chain (General-Purpose Chain)



กรุณาติดต่อฝ่ายขายสำหรับข้อมูลสินค้า

Swing Chain



Proof Coil Chain



Short Link Chain

JIS F 2106-1995

