


MANUAL TROLLEY


KT-GT GEARED TROLLEY

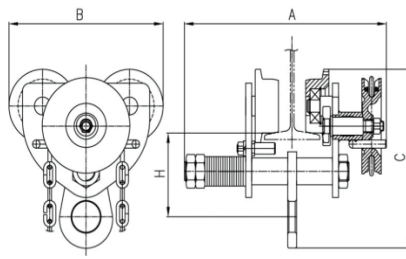

GCT610 SERIES

MODEL	RATED LOAD (T)	TEST LOAD (T)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
			A	B	C	H		
0.5	0.5	0.75	271	172	190	108.5	75-125	9
1	1	1.5	271	206	222	122	75-125	12.6
1.5	1.5	2.25	308	231	238.5	130	100-150	15.9
2	2	3	308	240	267	132.5	100-150	17
3	3	4.5	342	279	319	181	100-150	25
5	5	7.5	384	318	384	219	125-175	50
10	10	15	442	380	490	275	125-180	100


KT-PT PLAIN TROLLEY

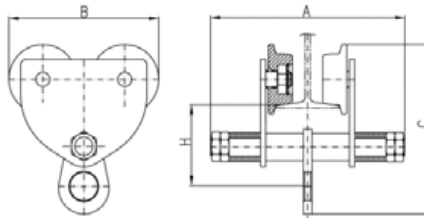

GCT610 SERIES

MODEL	RATED LOAD (T)	TEST LOAD (T)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
			A	B	C	H		
0.5	0.5	0.75	208	172	190	108.5	75-125	3.3
1	1	1.5	220	206	222	122	75-125	7.9
1.5	1.5	2.25	260	231	238.5	130	100-150	12
2	2	3	260	240	267	132.5	100-150	13.2
3	3	4.5	285	279	319	181	100-150	23
5	5	7.5	338	318	384	219	125-175	44
10	10	15	362	380	490	275	125-180	88


KT-G GEARED TROLLEY with ANTI-COLLISION

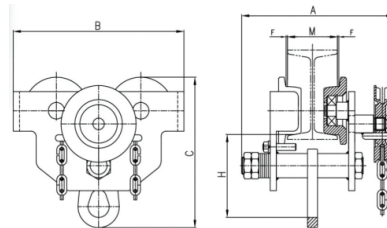

TG SERIES

MODEL	RATED LOAD (T)	TEST LOAD (T)	CHAIN PULL TO LIFT FULL LOAD (N)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
				A	B	C	H		
0.5	0.5	0.75	60	248	196	190	108	68-126	9
1	1	1.5	80	280	236	211	115	80-146	14
2	2	3	140	318	273	236	130	80-168	16
3	3	4.5	150	340	320	295	164	88-168	27
5	5	7.5	170	365	366	334	177	100-170	50
10	10	15	320	410	389	460	237	122-203	93
20	20	30	340	475	798	575	300	122-203	215
30	30	37.5	352	392	625	551	260	150-180	230

KT-P PLAIN TROLLEY with ANTI-COLLISION

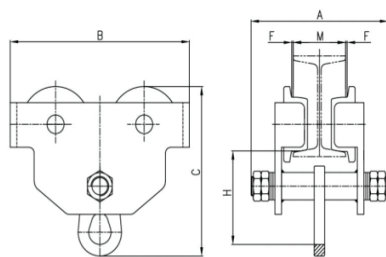

TP SERIES

MODEL	RATED LOAD (T)	TEST LOAD (T)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
			A	B	C	H		
0.5	0.5	0.75	208	196	190	108	68-126	5.5
1	1	1.5	242	236	211	115	80-146	9.5
2	2	3	280	273	236	130	80-168	13.5
3	3	4.5	300	320	295	164	88-168	25
5	5	7.5	316	366	334	177	100-170	44
10	10	15	343	389	460	237	122-203	90